

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau




(43) International Publication Date  
15 April 2004 (15.04.2004)

PCT

(10) International Publication Number  
**WO 2004/031000 A1**

- (51) International Patent Classification<sup>7</sup>: **B60R 21/22**, (74) Agent: **MEULLER, Erik**; Autoliv Development AB, S-447 83 Vårgårda (SE).
- (21) International Application Number: PCT/SE2003/001521
- (22) International Filing Date: 1 October 2003 (01.10.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 0222732.0 1 October 2002 (01.10.2002) GB
- (71) Applicant (for all designated States except US): **AUTOLIV DEVELOPMENT AB** [SE/SE]; S-447 83 Vårgårda (SE).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **BRADBURN, Alan** [GB/GB]; 23 The Moat, Weston Coyney, Stoke on Trent, Staffordshire ST3 6NB (GB).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: AN AIR-BAG

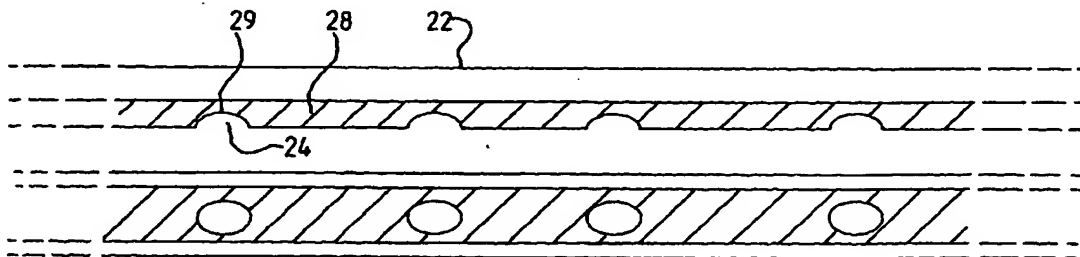

(57) Abstract: An air-bag (10) is disclosed which defines at least one inflatable region (14). The air-bag (10) is provided with a gas supply duct (22) which extends into the air-bag (10). The gas supply duct (22) is formed of fabric and is provided with at least one outlet aperture (24) therein through which gas may flow into the said at least one inflatable region 14 of the air-bag (10). The outlet aperture (24) is provided with a reinforcement to reinforce the periphery of the aperture (24) in order to prevent undesirable fraying of the fabric around the periphery of the aperture (24), or undesirable deformation characteristics of the fabric around the periphery of the aperture (24), as the air-bag (10) is inflated.